D25/119

13/6

T OFFICE
FEB 1 1950
DESIGN DIVISION

LIBRARY
JAN 20 1950
U S PATENT OFFICE

NT OFFICE
1950
SIGN DIVISION

Bronze

MOULDINGS BY LOX

Permanence • Safety • Beauty • *for Sch*
Hospitals, Theatres, Recreational Buildings, .
Auditoriums, Office Buildings, Naval Const
Institutions, Factories and Government Bu

THE LOXIT MOULDING CO., 1217 W. WASHINGTON BLVD

LOXIT *Bronze* MOULDINGS

LABLE IN DIMENSIONS LISTED. OTHER DIMENSIONS ON ORDE

...ption

...⅝″ Plain Flange
BR-83-G.....1″ Scored Flange
BR-84-L.....1¼″ Heavy Duty, Plain Flange

ANGLES

(Approx. 1/16″ thick)

Description

...¾″ x ¾″ Inside Corner, Plain
...¾″ x ¾″ Outside Corner, Plain
...¾″ x ¾″ Inside ...rner, Rippled
...¾″ Outside. ...r, Rippled
...nside Plain
...utside Plain
...drilled and ...l on order ...gs.
...2½″ and ...ck.

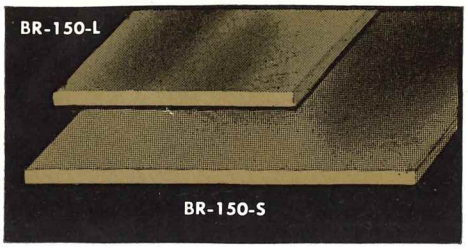

FLAT STRIPS

Number	Description
BR-150-L	1¼″ Plain Face (Approx. 1/16″ Thick)
BR-150-S	2″ Plain Face (Approx. 1/16″ Thick)

NOTE: We shear wide flat stock to narrower widths on order.

Heavy bars carried in stock in various dimensions. Ask for available sizes.

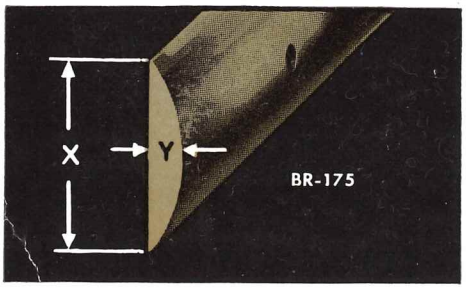

SOLID OVAL-TOP SECTIONS

Number	Width X	Thickness Y
BR-175-A	½″	7/64″
BR-175-B	⅝″	5/32″
BR-175-C	¾″	3/16″
BR-175-E	⅞″	⅛″
BR-175-G	1″	¼″

PATENT OFFICE FEB 1 1950 DESIGN DIVISION

CAP STRIP

Number	Description
BR-250-D	5/32″ Flat Top
BR-251-D	5/32″ Bevelled Top

Can be used for ⅛″ or thinner material by building up with paper, felt or shims.

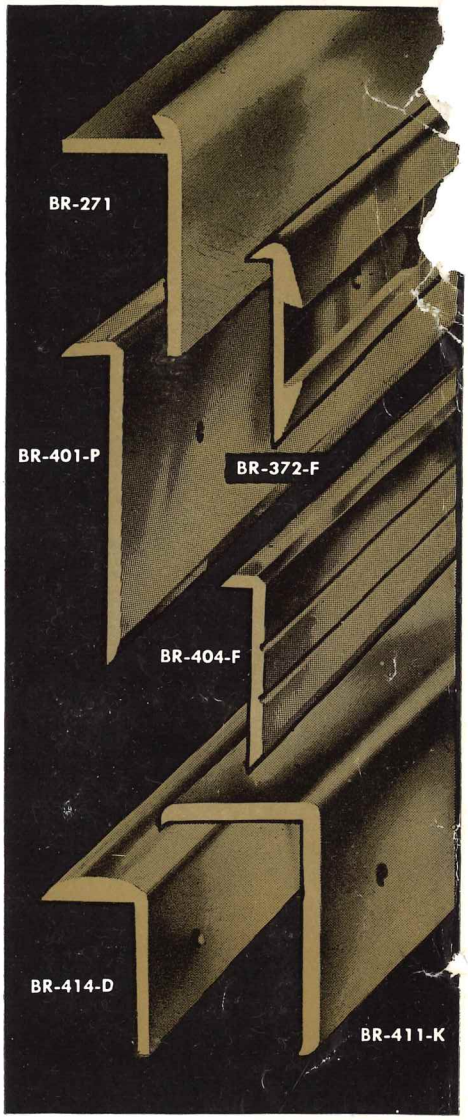

COUNTER FACINGS

UNDERSLUNG

Number	Description
BR-271-CH	⅛″ x 1 1/16″
BR-271-CS	⅛″ x 2″

FEATURE STRIP MOULDING

BR-372-F	15/16″ Face under lip, ½″ Feature Strip

Beaded Plastic Feature strips in Black, Red, Blue and Yellow available.

APPLIED-AFTER TYPE

BR-401-P	1⅝″ Plain Face
BR-404-F	15/16″ Fluted Face
BR-411-K	¾″ x 1 3/16″ Plain Face, Flat Top
BR-414-D	½″ x 13/16″ Plain Face, Oval Top

END STOPS—INSIDE AND OUTSIDE CORNERS

We can furnish end stops for all solid sections immediately upon receipt of order. We will cut mitered end stops for other sections where such fittings are practical. We are equipped to furnish inside and outside corners, mitered and welded or unwelded, upon order. Fittings with 3″ legs will be furnished unless specified otherwise.